Installation:

Motion Sensor Optional (Sold Separately)

1. Take out waterproof cap.
2. Screw-in motion sensor.

INote:Turn off power before you oprating
The more details please kindly check motion sensor specification.

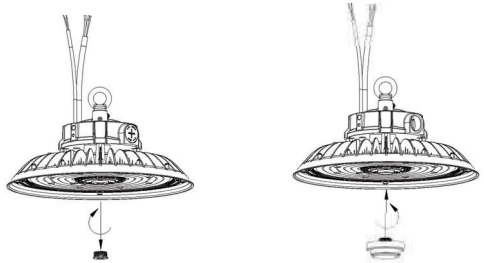

Adjusting power and color temperature

1. Flip the color temperature switch to the desired color temperature.
2. Flip the power switch to the desired wattageas shown in the figure.

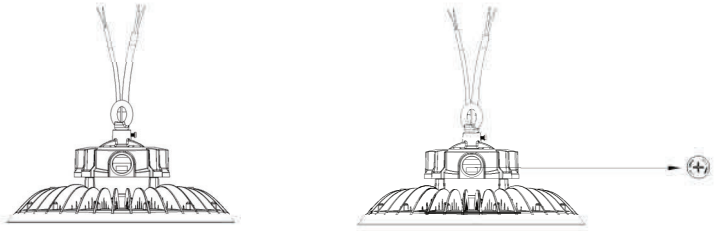

WARRANTY:

LIMITED FIVE-YEAR WARRANTY.
Should this product fail to perform satisfactorily due to a defect or poor workmanship within five years from the date of purchase, return it to the place of purchase and it will be replaced free of charge. Incidental or consequential damages are excluded from the warranty.

LED HIGH BAY LIGHT

Installation Instructions

energy harness
LED LIGHTING SOLUTIONS

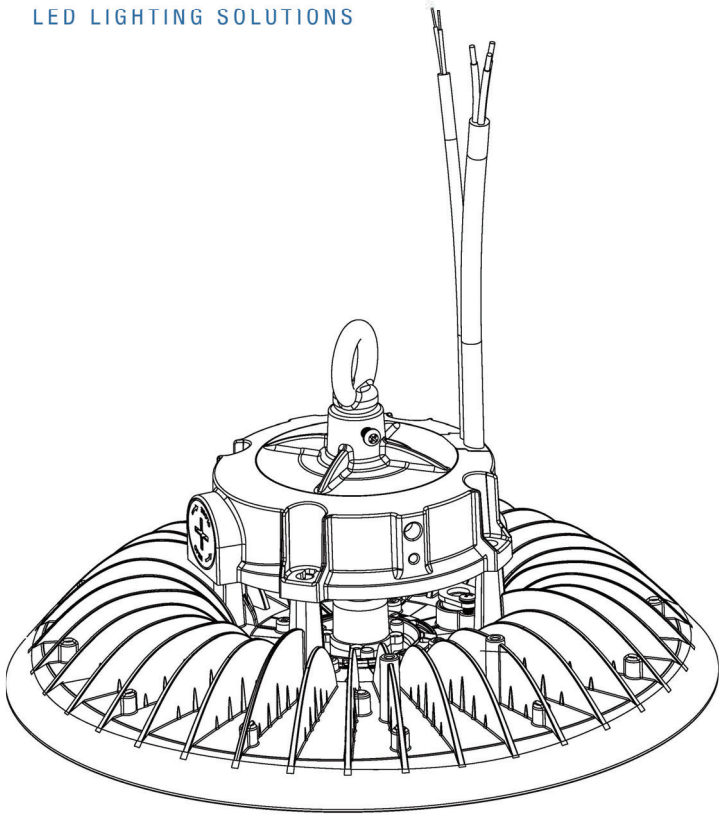

100W/150W/200W/240W/300W

Safety Instruction:

- READ CAREFULLY BEFORE INSTALLING FIXTURE.
- PLEASE KEEP THIS MANUAL FOR FUTURE USING.
- FIXTURES MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES.
- PROPER GROUNDING IS REQUIRED FOR SAFETY.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON. FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- MAKE CERTAIN POWER OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.
- CHECK IF VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER.
- PLEASE USING APPROVED CONNECTORS.

Maintenance Caution:

1. Review the below picture before beginning, and make sure the fixture is grounded properly.
2. For lighting controls, using functioning correctly.
3. Turn the power off and wait for fixture cooling to operate.
4. Maintenance must be done by professionals.

Wire Connection:

1. Universal voltage driver permits operation at 120V-277V , 50/60Hz.
2. Universal voltage driver permits operation at 120V-277V , 50/60Hz with dimming microwave motion sensor.

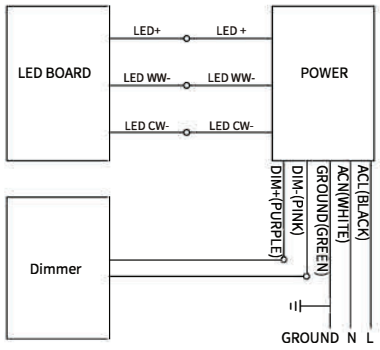

Figure 1

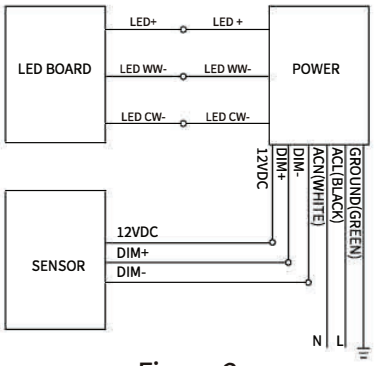

Figure 2

Installation Instruction:

Ceiling with Loop

1. Fix the luminaire with a chain to the ceiling;
2. Use the buckles to fix safety rope with the body and loop;
3. Connect the wires.

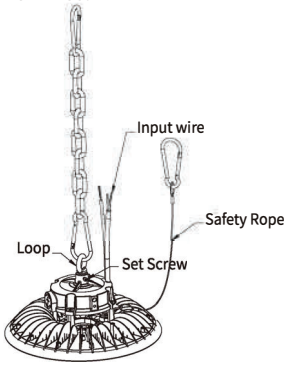

Ceiling with Hook

1. Unscrew the hook, fix the luminaire to the installation holders and screw the hook tightly;
2. Use the buckles to fix the safety rope with the body and hook;
3. Connect the wires.



Pendant Mounting

1. Fix the luminaire with bar and tighten the pole with an anti-skid screw;
2. Use the buckles to fix the safety rope with the lampbody and ceiling;
3. Connect the wires.



Wall Mounting

1. Trepan the installation holes as the size of the following figure;
2. Use screws to tighten the luminaire. The holder can be adjusted from 60D to 120D;
3. Use the buckles to fix the safety rope with the body and loop.
4. Connect the wires.

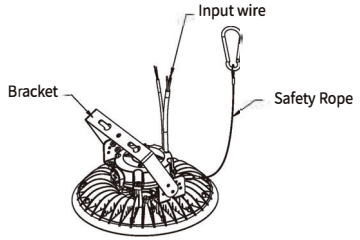

energy harness
LED LIGHTING SOLUTIONS