Project Name: _____

Part #: _____

Type: _____

LED LIGHTING SOLUTIONS
ENERGYHARNESS.COM

LED Strip Light

Features

- **Corrosion & Rust Proof**
- **Multiple Mounting Options**
- **3.2” Wide Linear Strips & Aluminum End Caps**

Applications

Utility Areas | Stairwells | Warehouses | Work Areas | General Area Lighting

Ordering Guide

PART NUMBER	DESCRIPTION	QTY
EHF-STRIP4-40W-CCT-277	4ft Wattage and CCT Selectable LED Strip Light	
EHF-STRIP4-40W-CCT-277-BBU	4ft Wattage and CCT Selectable LED Strip Light (With Preinstalled Battery Back Up Unit)	
EHF-STRIP8-64W-CCT-277	8ft, 68W, 50K CCT Selectable Strip Light	
ACCESSORIES		
EHA-SL-SMK	Surface Mounting Kit	
EHA-SL-HMK	Hanging Mounting Kit	
EHA-SL-FLP	Fixture Linking Plates	

Specifications

Input Voltage:	100-277VAC
Wattage:	4ft Model: 24W | 32W | 40W (Selectable) 8ft Model: 68W
Lumen Output:	4ft Model: 3,120lm | 4,160lm | 5,200lm (Selectable) 8ft Model: 8,840lm
Efficiency:	130lm/W
CRI:	>80
CCT:	4ft & 8ft Model(s): 3500K | 4000K | 5000K (Selectable)
Light Distribution:	130D
Working Temperature:	-13°F to 113°F
Equivalent:	72-120WMH/HP S
Length:	4ft

Dimensions

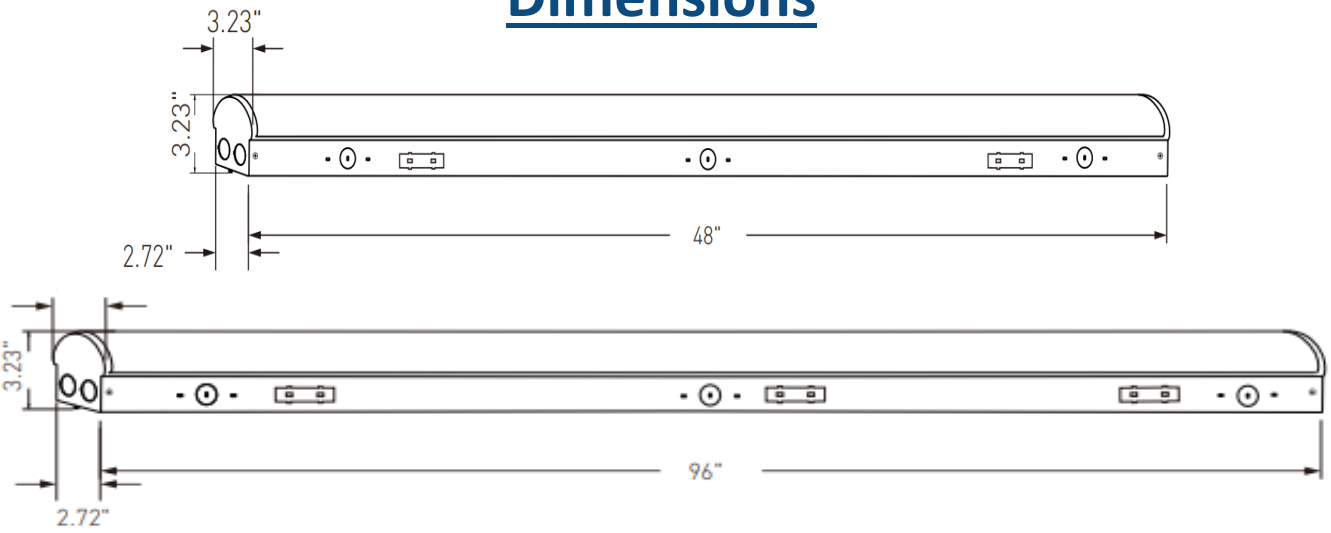

Accessory Overview

	EHA-SL-SMK Surface Mounting Kit
	EHA-SL-HMK Hanging Mounting Kit
	EHA-SL-FLP Fixture Linking Plates
	insert part number here 8W Emergency Battery

Photometrics Data

EHF-STRIP4-40W-CCT-277

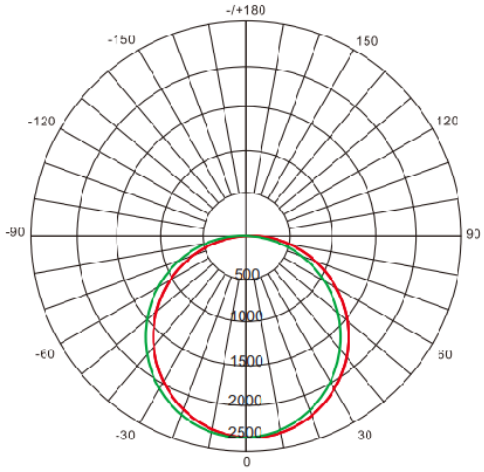

AVERAGE BEAM ANGLE(50%): 130°

Lumens:5200 LM
Test Number:40W
Test Number:5000K

UNIT:CD
- C0/180,130.9
- C30/210,130.5
- C60/240,129.3.
- C90/270,129.1

EHF-STRIP8-68W-CCT-277

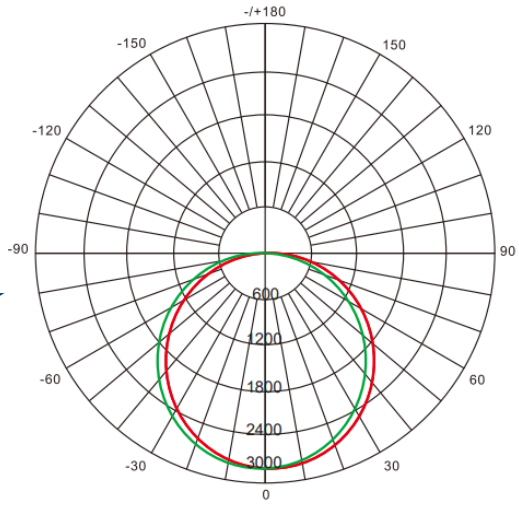

AVERAGE BEAM ANGLE(50%): 130°

Lumens:8840 LM
Test Number: 68W
Test Number:5000K

UNIT:CD
- C0/180,130.9
- C30/210,130.5
- C60/240,129.3
- C90/270,129.1