Project Name: _____

Part #: _____

Type: _____

energy harness
LED LIGHTING SOLUTIONS
ENERGYHARNESS.COM

LED T5 Tube Light

Features

- 54W Fluorescent Replacement
- Liquid Powder Coated Glass, Reduces Glare
- NSF Certified
- Built-In Universal Voltage Driver
- Universal-Ended Powered
- G5 Base

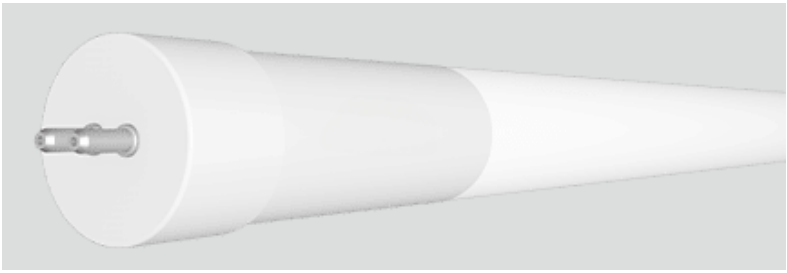

Applications

Retail Spaces | Supermarkets | Airports | Offices | Healthcare Facilities

Ordering Guide

Example:

EHL45	T5	24	50K	F	UEB
Model / Length	**Diameter**	**Wattage**	**CCT**	**Lens**	**Connection**
EHL45 = Linear 45”	T5 = 7/8” Tube	24 = 24W	50 = 5000K	F = Frosted Lens	UEB = Universal-Ended Bypass

LED T5 TUBE LIGHT

SPECIFICATION	
Part #:	**EHL45-T524-50K-F-UEB**
Input Voltage:	120-277V
Wattage:	24W
Lumen Output:	3300lm
Efficacy:	138lm/W
CRI:	82
Power Factor:	>0.90
CCT:	5000K
Beam Angle:	160°
Fixture Operating Temperature:	-4°F-95°F
Lamp Ambient Temperature:	-4°F-113°F
Base:	G5

DIMENSIONS

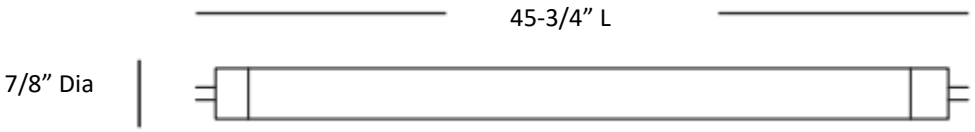

PHOTOMETRICS DATA

Luminaire Data	
Part Number	EHL45-T524-40K-F-UEB
Description	24W LED T5 Tube Light
Fixture Lumens (lm)	3,300lm
Wattage (W)	24W
Efficacy (lm/W)	138lm/W

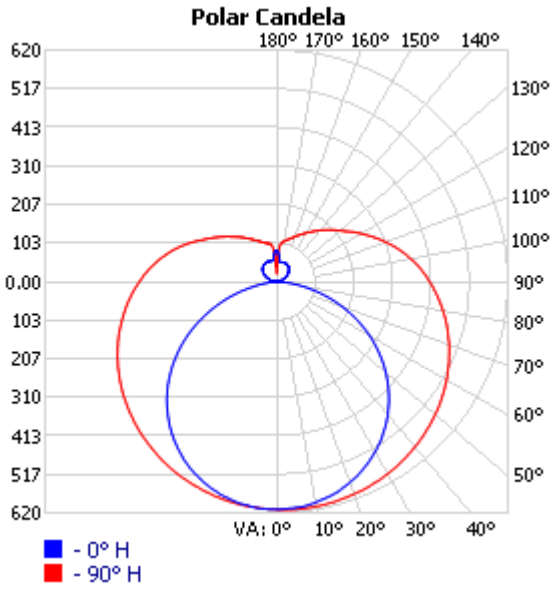

Zonal Lumen Summary		
Zone	Lumens (lm)	% Fixture
0-40	827.2	23.1%
0-60	1,597.3	44.6%
0-90	2,590.9	72.4%
90-180	989.9	27.6%
0-180	3,580.8	100%