


2X2 Option



Energy Harness Indirect LED Troffer Fixtures offer a modern design with the latest lighting technology. This product's CCT and wattage tunability along with its architectural design allow for a large range of applications. While this product is visually pleasing, its performance is not to be outshined. Combining energy efficiency and great distribution, our Indirect LED Troffer Fixtures will provide clean, bright light for years to come.

2X4 Option

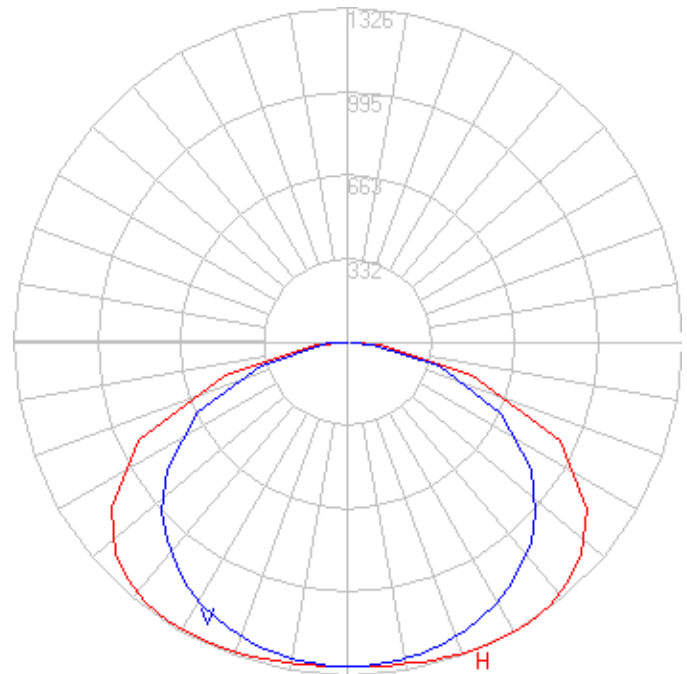

Applications

- Offices
- Lobbies
- Hospitals

- Schools
- Hallways
- Conference Rooms

UL Pending



Specifications

- Tunable by DIP switch
- Transparent optics
- 0-10V Dimmable
- Fits standard T-Grid ceilings
- Power factor > 0.9
- CRI > 80

Accessories

-Wireless controls



-Battery backup options



-BBU Bracket



Indirect LED Troffer	EHF- IND-2X2DS-40-277	EHF- IND-2X4DS-50-277
Wattage (Tunable)	30W, 35W, 40W	30W, 40W, 50W
Lumens	3000 lm, 3500 lm, 4000 lm	4000 lm, 4500 lm, 5000 lm
Efficacy	100 lm/w	100 lm/w
Size (L x W)	2' x 2'	2' x 4'
CCT (Tunable)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
Voltage (AC)	100-277 V	100-277 V