




Energy Harness® LED Flood light fixtures are designed to replace metal halide flood light fixtures with clean bright light for secure illumination. These fixtures have an excellent optical design, optimal cooling heatsink, even light distribution, and great heat dissipation for longevity. Give your fixtures a modern look while upgrading your light output, all while reducing your energy cost!



EHF-FLOOD-5050K-277

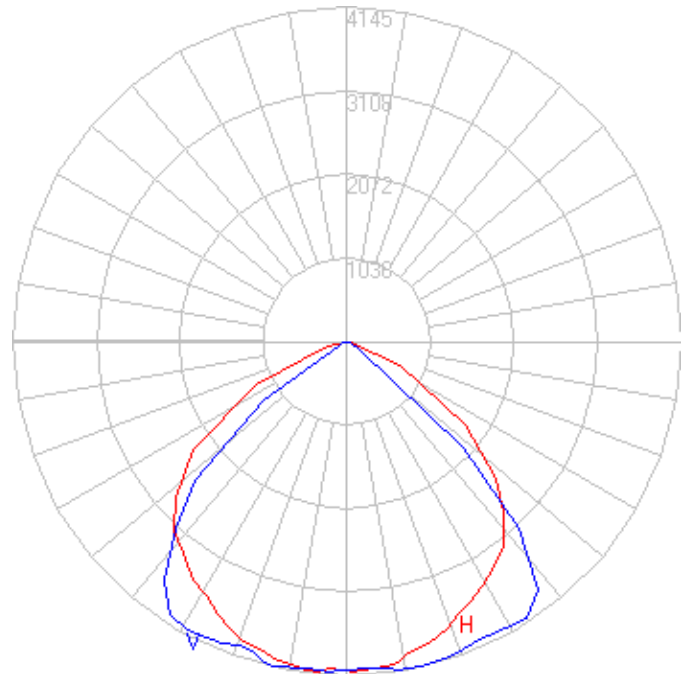

Applications

- Parking lots
- Flag lighting
- Sign lighting

- High security areas
- Sidewalks
- Monuments

Specifications

- CRI > 75
- IP65 rated
- Phillips SMD 3030 LEDs
- Working Temp:
-22°F - 140°F
- Beam angle > 130°
- Diecast aluminum housing
- Lifespan > 50,000hrs
- 5 year warranty
- Power Factor > 0.9
- Meanwell internal driver
- Adjustable mounting bracket
- 10W, 20W, 40W includes mounting knuckle

Replacement :	15-40W	40-75W	75-125W	100-200W	250-400W
EHC Part Number	EHF-FL-1050K-277-KN	EHF-FL-WP-2041K-277-KN	EHF-FL-WP-4041K-277-KN	EHF-FLOOD-5050K-277	EHF-FLOOD-10050K-277
DLC Number	N/A	N/A	N/A	PPJPS1YUJ	PCDYVPS5R
Wattage	10W	20W	40W	50W	100W
Lumens	1500lm	2310lm	4100lm	5000lm	10000lm
Efficacy	150lm/w	115lm/w	102.5lm/w	100lm/w	100lm/w
Size (L" x W" x H")	6.13" x 5.38" x 1.5"	7.88" x 6.63" x 10.63"	7.88" x 6.63" x 10.63"	10.5" x 9" x 2"	10.5" x 10" x 6.5"
Color (CCT)	5000K	4100K	4100K	5000K	5000K
Voltage	100-277VAC	100-277VAC	120-277VAC	100-277V (480V optional)	100-277V (480V optional)
Replacement :	450-600W	650-800W			
EHC Part Number	EHF-FLOOD-15050K	EHF-FLOOD-20050K			
DLC Number	P6VGZPDG6	PVUJAV7AW			
Wattage	150W	200W			
Lumens	15000lm	20000lm			
Efficacy	100lm/w	100lm/w			
Size (L" x W" x H")	10.5" x 10" x 6.5"	15.5" x 12" x 9"			
Color (CCT)	5000K	5000K			
Voltage	100-277V (480V optional)	100-277V (480V optional)			