


Energy Harness® LED Parking Garage lights have a traditional canopy light design intended for outdoor ceiling mounted applications. They utilize the latest in LED technology including a weather sealed IP65 LED driver and efficient thermal management. This light features high-performance illumination that can last up to 100,000 hours. It is ideal for replacing 100-250W metal halide lighting and delivers significant energy savings for facilities providing 24 hour lighting.



EHF-GL-5550K-277-SQ

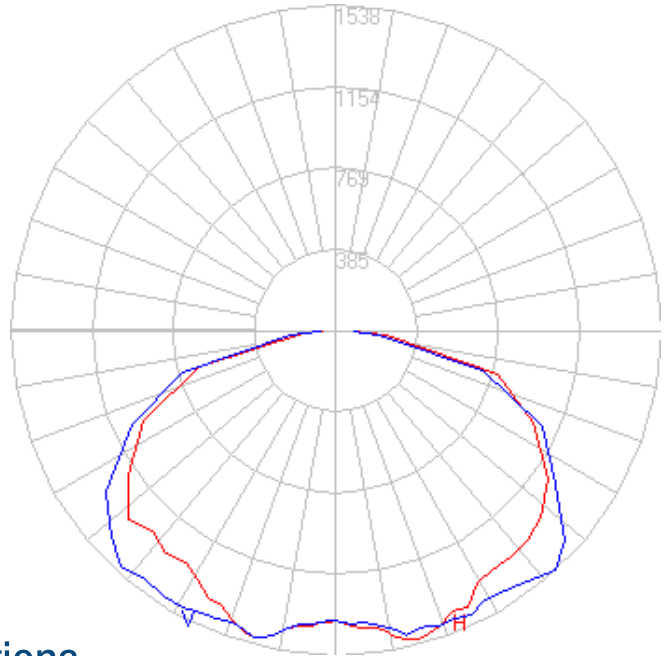

Applications

- Parking Garages
- Canopies
- Gas Stations

- Pavilions
- Shopping Plazas
- More!



Specifications

- CRI > 80
- Beam Angle: 120°-180°
- Power Factor: > 0.9
- Lifespan: > 50,000hrs
- IP54 Rated
- Aluminum Housing
- Operating Temperature:
-4°-104°F
- Surface-mount Installation

Product Replacements



| LED Garage Light Fixture: | 40W Round | 60W Round | 55W Square | 75W Square |
|---------------------------|---------------------|---------------------|---------------------|---------------------|
| EHC Part Number | EHF-GL-4050K-277-RD | EHF-GL-6050K-277-RD | EHF-GL-5550K-277-SQ | EHF-GL-7550K-277-SQ |
| Replacement | 100-150W | 150-250W | 100-175W | 150-250W |
| Wattage | 40W | 60W | 55W | 75W |
| Lumens | 5400lm | 8100lm | 6050lm | 8250lm |
| Efficacy | 135lm/w | 135lm/w | 110lm/w | 110lm/w |
| Size (D x H), (L x W x H) | 11.42" x 4.49" | 11.42" x 4.49" | 15" x 15" x 3" | 13.5" x 13.5" x 8" |
| Color (CCT) | 5000K | 5000K | 5000K | 5000K |
| Voltage (AC) | 100-277VAC | 100-277VAC | 100-277VAC | 100-277VAC |