




Energy Harness® Integrated LED Lighting provides a modern design that is a smart alternative to fluorescent lighting. This unique design allows for these products to be used as their own fixture or mounted inside of existing fixtures. Integrated LED tube lights are safer than fluorescent tubes as they do not contain mercury or glass.

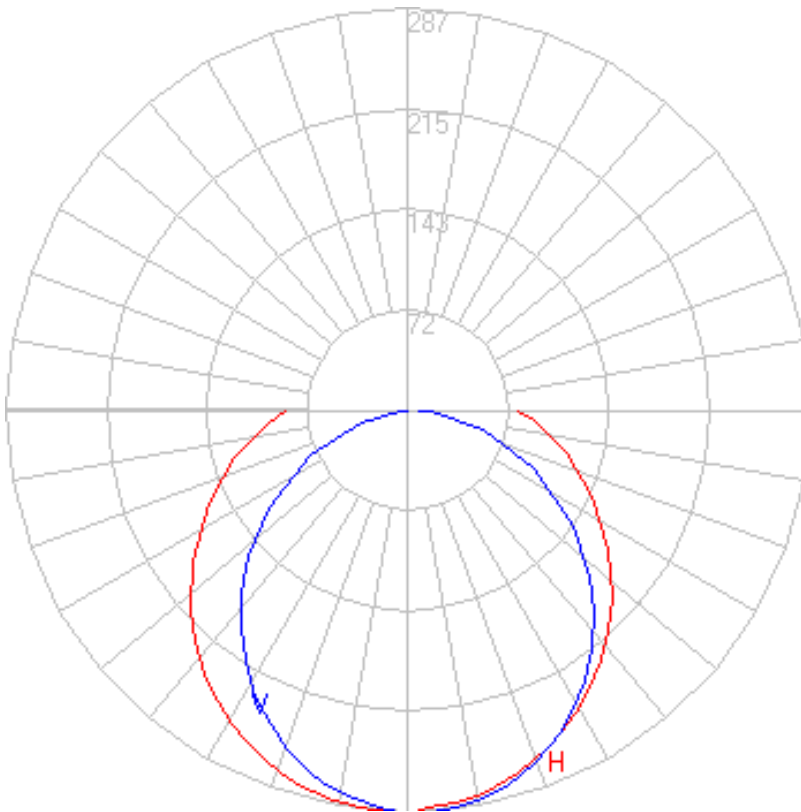

## Applications

- Ceilings
- Shelves
- Coolers

- Signs
- Cabinet lighting
- More!



## Specifications

- CRI > 80
- Beam angle > 120° for single, 240° for V-type
- Power Factor > 0.9
- IP40 rated
- Aluminum Housing
- Semi-frosted PC cover
- 100-277VAC 50/60hz
- Isolated internal driver
- Working Temp: -22°F - 140°F
- Efficacy: 105lm +/- 5lm
- Ballast bypass
- Isolated internal driver

## Accessories



EHA-ONOFF-CABLE (6')  
Sold separately

T8 Single :	2'	3'	4'	5'	6'
EHC Part Number	EHI24-T809-xxK	EHI36-T813-xxK	EHI48-T822-xxK	EHI60-T825-xxK	EHI72-T828-xxK
Replacement	15-25W	20-30W	30-40W	50-75W	70-85W
Wattage	9W	13W	22W	25W	28W
Lumens	993lm	1403lm	2389lm	2315lm	2590lm
Actual Length (in)	22.91"	34.96"	46.93"	58.78"	69.09"
Color (CCT)	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K 6500K	4000K, 5000K	4000K, 5000K
T8 V-Type :	2'	3'	4'	5'	6'
EHC Part Number	EHI24V-T815-xxK	EHI36V-T816-xxK	EHI48V-T822-xxK	EHI60V-T825-xxK	EHI72V-T828-xxK
Replacement	15-25W	20-30W	30-40W	50-75W	70-85W
Wattage	15W	16W	22W	25W	28W
Lumens	692lm	1195lm	1512lm	2019lm	2218W
Actual Length (in)	22.91"	34.96"	46.93"	58.78"	69.09"
Color (CCT)	5000K	5000K	5000K	5000K	5000K