

Project Name:

Part #:

Type:

LED Bollard

Features

- Ballast Bypass
- Easy installation
- Modern look
- Round dome, LED cone reflector
- Extruded aluminum housing
- Flush mounting base
- Vandal-Resistant screws
- Powdercoat finish
- Internal ballast tray for easy maintenance



Applications

Medical Facilities | Schools | Retail Centers | Banks | Universities

Ordering Guide

LED Bollard	15W
EHC Part Number	EHF-BOLLARD-1550K-277-BR
Wattage	15W
Lumens	1613lm
Efficacy	101 lm/w
Height	42.25" (1,073mm)
Diameter	7" (178mm)
Voltage (AC)	120-277VAC
Color (CCT)	5000K

Accessory Options



Surge Protection

Item Code: SP


Part #: EHA-SURGE-20kV-277V-Series

20kV 240-277V series wired surge protection,
diagnostic light, can style

Specifications

- Input Voltage: 120-277VAC
- Wattage: 15W
- Efficacy: 101 lm/W
- CCT: 5,000K
- Optics: Type V distribution (wide beam spread)
- Operating Temperature: -40°F - 104°F
- Lifespan: > 50,000 hours
- Fixture Material: Extruded Aluminum
- Lens: Clear Polycarbonate
- IP Rating: IP65
- Fixture Color: Bronze

Product Dimensions

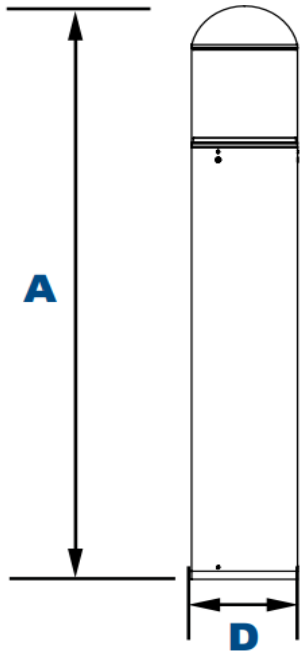

Dimensions

Diameter (D)


7" (178mm)

Height (A)

42¼" (1,073mm)

Photometrics Data

Luminaire Data	
Part Number	EHF-BOLLARD-1550K-277-BR
Description	Type V distribution, round dome, LED cone reflector bollard
Fixture Lumens (lm)	1632lm
Wattage (W)	15W
Efficacy (lm/w)	108 lm/w

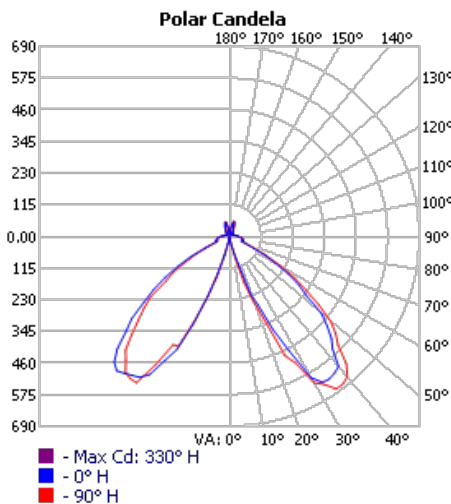

Zone	Lumens	%Fixture
0-40	607.6	43.10%
0-60	1311.4	80.4%
0-90	1505.3	92.3%
90-180	126.4	770.0%
0-180	1631.7	100%

