

Project Name:

Part #:

Type:

LED Post Top Area Light

Features

- Die-cast aluminum housing
- Tamperproof hardware
- Fade resistant powder coat finish
- IP65 Rated
- Meanwell power supply
- Clear transparent glass



Applications

Parks | Walkways | Parking Lots | Condos | Apartments

Ordering Guide

EHC Part #	EHF-POSTTOP-7550K-
Voltage (AC)	277 = 120-277VAC 480 = 347-480VAC
Wattage	75W
Lumens	7600lm
Efficacy	101 lm/w
Size (W"xH")	4.72" x 17.71"
Color (CCT)	5000K
Replacement	150-200W HID
Dimmable	1-10V
Fixture Color	Black

Accessory Options



Surge Protection

Item Code: SP

Part #: EHA-SURGE-20kV-277V-Series


20kV 240-277V series wired surge protection,
diagnostic light, can style

Specifications

- Input Voltage: 120-277VAC | 347-480VAC
- Wattage: 75W
- Efficacy: 101lm/W
- CCT: 5000K
- CRI > 70
- Power Factor > 0.995
- Distribution: Type V
- Operating Ambient Temperature: -4°F to 150°F
- Lifespan: > 54,000 hours
- Dimmable: 0-10V
- IP Rating: IP65 Rated
- EPA: 1.2
- Beam Angle: 110°
- Mounting: 2-3/8" | 3" tenon




Product Dimensions

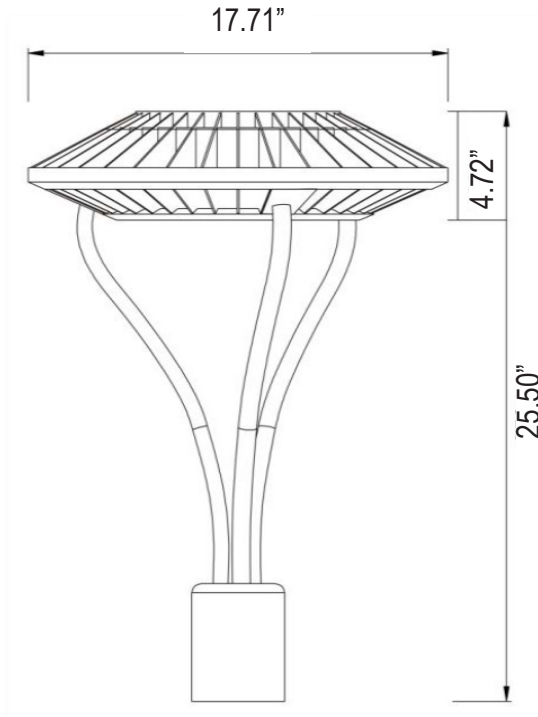

Photometrics Data

Luminaire Data	
Part Number	EHF-POSTTOP-7550K-277
Description	Type V distribution, 5000K
Fixture Lumens (lm)	7,600lm
Wattage (W)	75W
Efficacy (lm/w)	101 lm/w

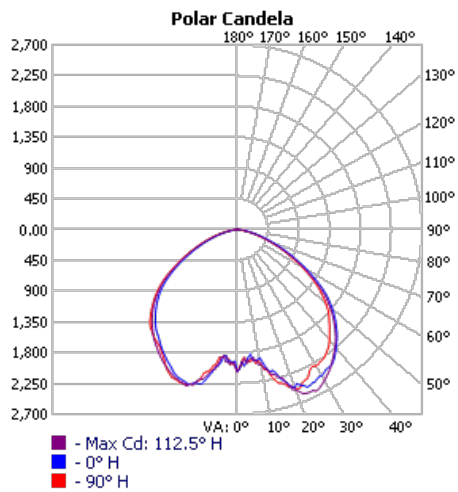

Zone	Lumens	%Fixture
0-40	3284	46.2%
0-60	5933.4	83.5%
0-90	7090	99.8%
90-180	12.8	0.2%
0-180	7102.8	100.0%

