



LED Integrated T5 Lights

Energy Harness™ Integrated LED Lighting provides a modern design that is a smart alternative to fluorescent lighting. This unique design allows for these products to be used as their own fixture or mounted inside of existing fixtures.

Integrated LED tube lights are safer than fluorescent tubes as they do not contain mercury or glass.

Great for ceilings, shelves, coolers, soffits, signs and more...!



EHC Integrated lights are maintenance free because they do not use a ballast. They are wired directly to A/C power for improved reliability. These lights can be easily daisy chained together from a single power source. The T5 Integrated Tubes are available in T5 Singles and Doubles, both in a variety of sizes and colors to meet your needs.

Product Replacements:



Accessories: (Included)



(Additional)

EHA-ONOFF-CABLE (3')



71 Mid Cape Terrace Ste 8
Cape Coral, Florida 33991
1-239-790-3300 (US sales)

Energy Harness Corporation
"Reducing the cost of your energy"

sales@energyharness.com
www.energyharness.com


5225 Exploration Drive
Indianapolis, Indiana 46241
1-317-999-5561 (Midwest sales)



LED Integrated T5 Lights

Specifications:

- CRI>80
- Beam Angle >120°
- Power Factor >0.9
- IP40/ IP65 rated
- Aluminum housing
- Semi-frosted PC Cover
- Ballast Bypass
- Single ended power input
- Connectable up to 250W
- 100-277VAC
50/60Hz
- Isolated internal driver
- Working Temp:
-20°C...+45°C
- Efficacy: 105lm +-5

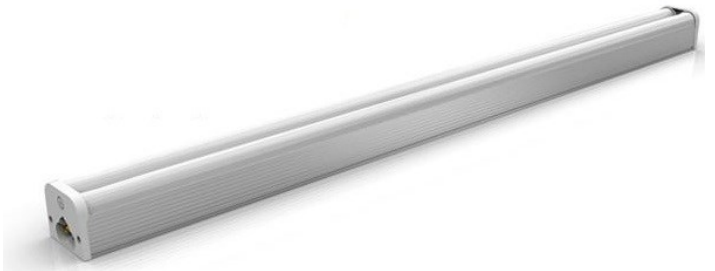

Certifications:



T5 Single	6"	2'	3'	4'	5'	6'
EHC Part Number	EHI06-T503-xxK	EHI24-T507-xxK	EHI36-T512-xxK	EHI48-T515-xxK	EHI60-T520-xxK	EHI72-T522-xxK
Replacement	10-20W	15-25W	25-35W	35-45W	50-75W	65-85W
Wattage	3W	7W	12W	15W	20W	22W
Lumens	296lm	692lm	1195lm	1512lm	2019lm	2218lm
Actual Length (Inches)	5.83"	21.85"	33.82"	45.47"	58.66"	70.43"
Color (CCT)	4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K
T5 Double	2'	3'	4'	5'		
EHC Part Number	EHI24D-T515-xxK	EHI36D-T525-xxK	EHI48D-T530-xxK	EHI60D-T540-xxK		
Replacement	30-45W	45-60W	45-60W	60-75W		
Wattage	15W	25W	30W	40W		
Lumens	1510lm	2575lm	3031lm	3575lm		
Actual Length (Inches)	22.28"	35.21"	45.91"	59.06"		
Color (CCT)	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K		

Energy Harness Corporation

"Reducing the cost of your energy"

71 Mid Cape Terrace Ste 8
Cape Coral, Florida 33991
1-239-790-3300 (US sales)

sales@energyharness.com
www.energyharness.com

5225 Exploration Drive
Indianapolis, Indiana 46241
1-317-999-5561 (Midwest sales)