





Energy Harness® LED Circular High Bay fixtures are great for replacing traditional metal-halide high bay fixtures. With their compact modern design and use of the latest integrated LED technology, these lights are sure to upgrade the look, performance, and energy efficiency of your existing lighting. They are produced in a variety of sizes and wattages to meet the needs of any high bay application.

EHF-HB-CIR-20050K-277-BL-HU

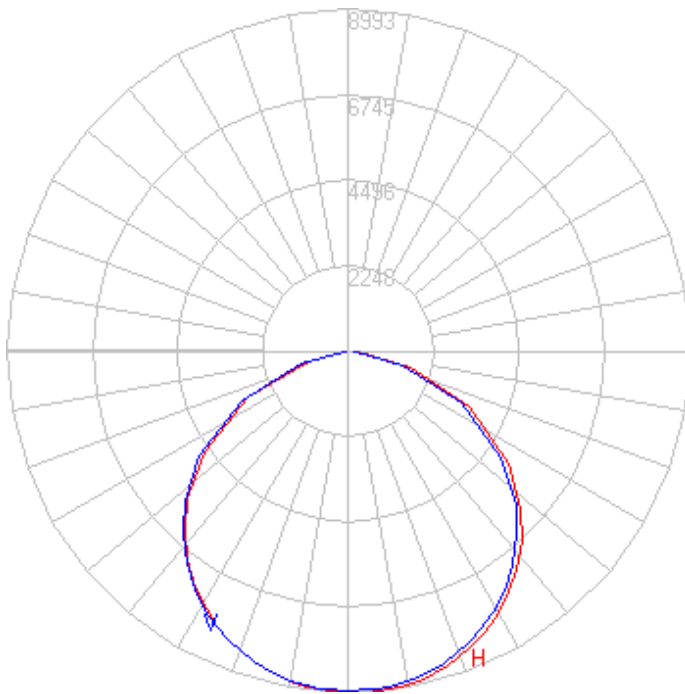

EHF-HB-CIR-15050K-277-BL-HU

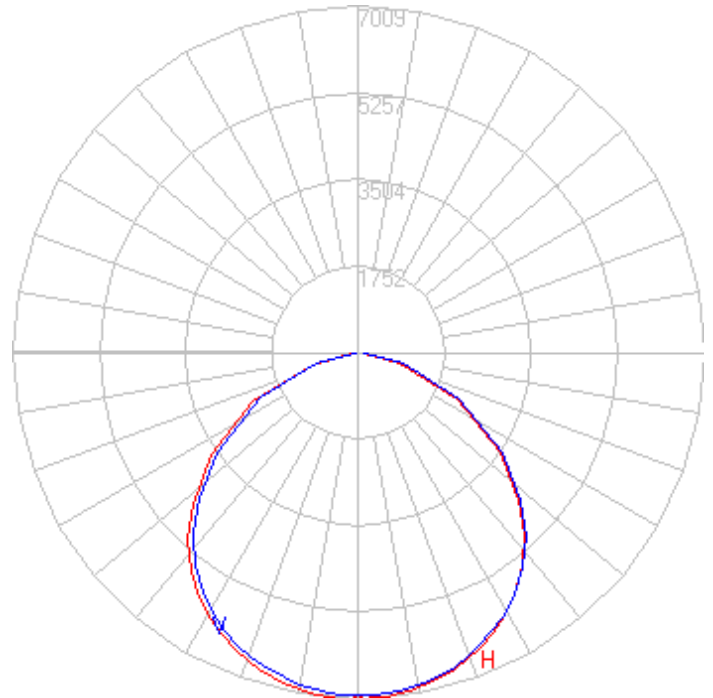

Applications

- Storage facilities
- Maintenance facilities
- Factories

- Gymnasiums
- Warehouses
- Fabrication shops

Specifications

- 50-60Hz
- 1-10V Dimmable (upon request)
- Lifespan > 54,000hrs
- Meanwell power supply
- Total Harmonic Distortion < 15%
- 110°-120° beam angle
- IP65 Rating
- Aluminum housing
- Power Factor > 0.93
- Black finish
- Working Temp: -22° - 122°F

Accessories

- Aluminum or acrylic bell
- Motion sensor
- Wire guard

| Circular High Bay: | 100W | 150W | 200W | 300W |
|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| EHC Part Number | EHF-HB-CIR-10050K-277-BL-HU | EHF-HB-CIR-15050K-277-BL-HU | EHF-HB-CIR-20050K-277-BL-HU | EHF-HB-CIR-30050K-277-BL-HU |
| Replacement | 150-300W | 250-400W | 400-750W | 750-1000W |
| Wattage | 100W | 150W | 200W | 300W |
| Lumens | 13000lm | 21000lm | 28000lm | 42000lm |
| Efficacy | 130lm/w | 140lm/w | 140lm/w | 140lm/w |
| Size (D"x H") | 13.00" x 8.11" | 10.24" x 8.46" | 10.24" x 9.06" | 12.6" x 6.2" |
| Color (CCT) | 5000K | 5000K | 5000K | 5000K |
| Voltage (AC) | Available in 100-277V or 480VAC | Available in 100-277V or 480VAC | Available in 100-277V or 480VAC | Available in 100-277V or 480VAC |
| Circular High Bay: | 277V | 277V | 277V | 277V |
| DLC Product ID | PUR068NW | P0T571YZ | PYXPKFPL | POGMJV91 |
| Circular High Bay: | 480V | 480V | 480V | 480V |
| DLC Product ID | PF2MYZ1S | PGD7JAFH | P8W30F2Q | PDFTT9U7 |